




1/5

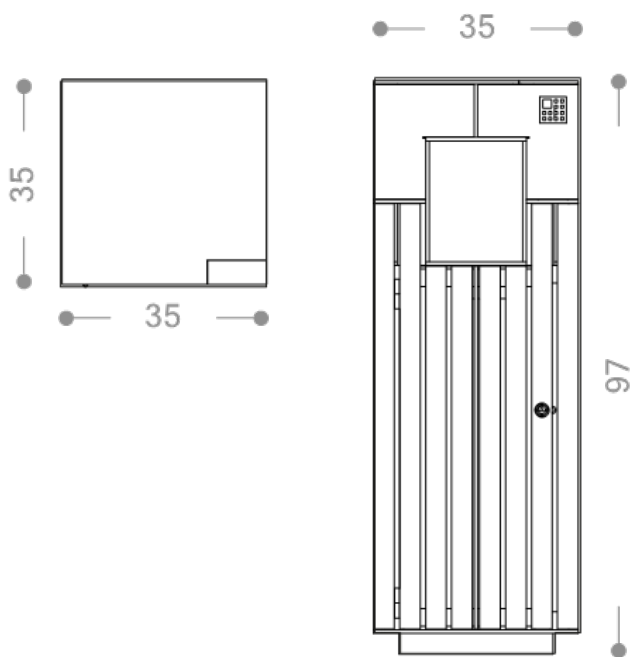

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DESCRIPTION


Structure

"Target" from the English literally "objective", a bin characterized by its structure that visually declared on the outside draws a target, a silent invitation not to waste and collect it inside. Different types of covering offer the possibility of adapting the final appearance to the surrounding area. The result is a universal bin, with a linear shape, usable in public spaces outdoors but also indoors. For smokers it is available with a built-in ashtray, protected from rainwater that could otherwise disperse its contents.


- Main frame made of laser-cut shaped supports, made of 6 mm thick sheet metal; upper external paneling, shaped and made of 1.5 mm thick galvanized sheet metal.
- Lower covering made of okumè type wooden slats, section 35x15 mm.
- The bin is equipped with holes for the introduction of waste on all four sides.
- Opening of the bin with a door with an appropriate lock and internal container with a capacity of approximately 38 litres, made of galvanised sheet metal and equipped with handles for extracting and removing the bag (not supplied).
- An upper corner of the bin is characterised by an ashtray (removable) with holes for extinguishing and inserting butts.
- Lower plinth made of galvanised sheet metal and equipped with holes for fixing to the ground.

Overall weight: 35Kg


COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 7038
(Upper panels)



RAL 7005
(Ashtray)



RAL 7016
(Structure)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code 607-CO-M - Target iron litter bin

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Targhet wood litter bin
Product code 607-CO-L

Rev. 0 of 04/07/2024



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

MAINTENANCE PLAN FOR WOODEN PARTS

For a long service life of wood planks, periodic maintenance work is necessary, therefore, maintenance is recommended **every three to six months and in any case once a year**.

For periodic maintenance, carry out light sanding with a 150-grit abrasive sponge, apply a thin coat of Adler Oil, absolutely avoiding the formation of layers.

For the renewal of aged and graying elements, proceed with a thorough sanding with a 150-grit abrasive sponge in the direction of the fibers, removing any existing paint residue.

Proceed with an initial application of Adler Light Mahogany Oil by brush. After 12 hours, apply a second coat of Olio Adler light mahogany with a brush and then pull off excess product with a soft cloth.

Please note, necessary maintenance products such as Oils and impregnants are not included in the product supply but can be requested separately.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles



DELIVERY

The product comes with steel screws and fixing instructions.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 14 Jan 2008

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles