


1/5

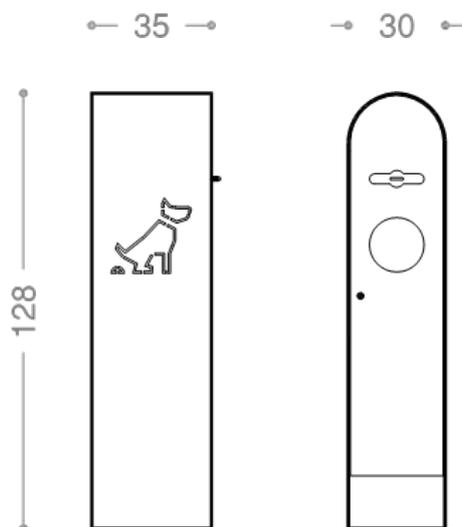

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DESCRIPTION

Structure

Made of an external body shaped in galvanized sheet metal, thickness mm. 4, characterized by a stylised dog-shaped carving on both sides, the shapes are obtained by cutting with high definition plasma technology. Front door made of galvanized steel sheet thickness mm. 2 equipped with a hole for the introduction of waste, the hole is complete with a door to prevent the possible escape of unpleasant odours. In the upper part of the door there is a drawer for the collection kit, the simple extraction of the drawer allows the kit to come out for use by the user.

- The door is equipped with a universal key lock to allow the opening of the emptying phases of the internal container and the refilling of the collection kits.
- Rear buffer made of galvanized steel sheet thickness mm.
- The structure is equipped at the base with holes for fixing to the ground.
- Emptying by opening the door and extracting the container (collection kit and bag not supplied).
- The kits are refilled by inserting them into the appropriate cartridge located in the upper dispenser (see detailed image).
- The Tobia container is designed for use with the CLEAN-DOG-KIT collection kit, item 325.

Overall weight: 42Kg

Datasheet

Tobia Little bin

Product code G460


Rev. 1 of 28/09/2022



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 7001
(Door, back panel and inner container)



RAL 6017
(Door and drawer)



RAL 9016
(External shell)

Customers can request a different finish from the RAL color options available on our website.

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

Datasheet

Tobia Little bin

Product code G460

Rev. 1 of 28/09/2022



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment is used to get rid of oils and fats from metal surfaces by using special degreasing liquids. The process involves drying in a dryer for 15 minutes.

Sandblasting

The porosity of metal surfaces is increased by the manual sandblasting process with river sand, which results in an increase in thermosetting powder adhesion.

Anticorrosive application

The first step in the coating process involves using a thermosetting powder anti-corrosion base made of epoxy resins and specific pigments. It provides enough protection against the elements.

Anticorrosive polymerization

The process involves cooking in an industrial curing oven at 180°C. In this step, the powder is transformed into a coating that is uniform, smooth, and lasting.

Polymerization coloured finish

The final phase of coating with thermosetting powders. The application complies with the same principles as the anti-corrosion.

Polymerization colored finish

The final product will be cured in an industrial curing oven at a temperature of 180°C. The procedure is based on the same principles as the polymerization of the anti-corrosion agent. The powder becomes a uniform coating, and the surface becomes the characteristics of the chosen color type, including smooth, peeled, or wrinkled, etc.

4/5

Dimcar has the authority to make changes to the products that are useful for improving their quality. The images on the cards may not accurately portray the actual colors of the articles

DELIVERY

The product comes with an assembly kit that includes steel screws and instructions for mounting and fixing.

FIXING

The product is designed to be fixed to the ground using expansion anchors and dowels.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality Management System.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate according to Italian Law D.M. of 17 Jan 2018