


Datasheet

Tresette bike rack
Product code G496

Rev. 0 of 15/10/2018



1/5

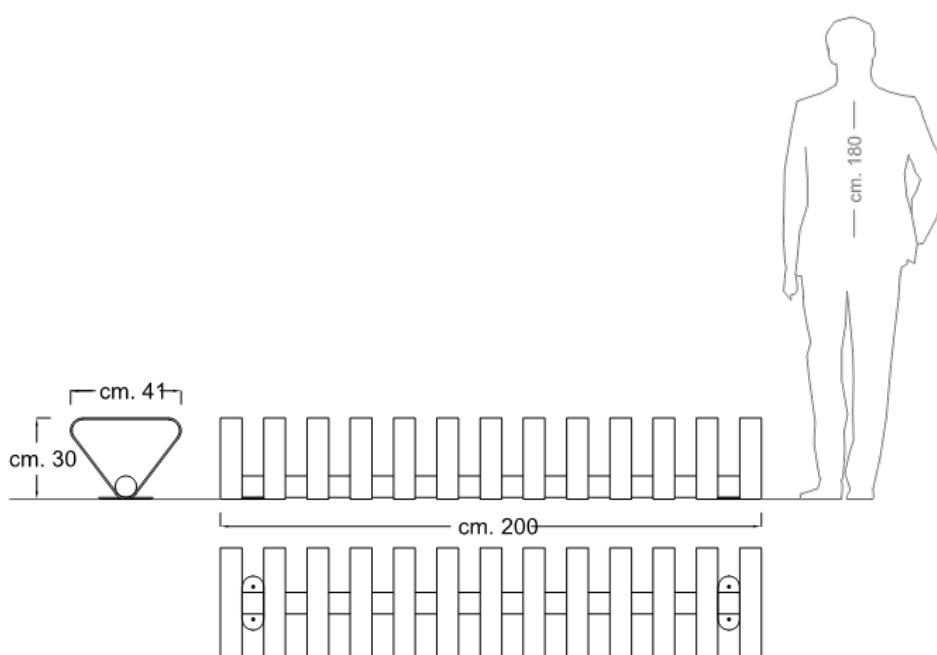

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Tresette bike rack
Product code G496

Rev. 0 of 15/10/2018



DESCRIPTION

Structure

With a particular shape, characterized by shaped triangular supports, made of 80x6 mm galvanized steel flat iron. The supports are positioned with a tip triangle, and anchored in sequence on a crosspiece made of galvanized steel round tube Ø 60x2 mm.

- The crosspiece is equipped with plates with holes for fixing to the ground.

Total weight: 62Kg

Datasheet

Tresette bike rack
Product code G496

Rev. 0 of 15/10/2018



COLOR FINISH AS PROVIDED IN THE CATALOG



RAL 1003
(Steel parts)

Customers can request a different finish from the RAL color options available on our website.

PRODUCT VARIANTS



Product code G496-BIS - Tresette bike rack model A

Datasheet

Tresette bike rack
Product code G496

Rev. 0 of 15/10/2018



ANTICORROSIVE TREATMENTS AND FINISHES

Washing

Spray treatment for removing oil and grease from metal surfaces using special degreasing liquids. Subsequent drying in dryer for 15 minutes.

Sandblasting

Manual sandblasting process with river sand, which increases the porosity of metal surfaces and thus the adhesion of thermosetting powders.

Anti-corrosive application

First painting cycle with an anticorrosive thermosetting powder primer based on epoxy resins and special pigments. It provides adequate protection against weathering.

Anticorrosive polymerization

Baking in an industrial curing oven at a temperature of 180°C. During this stage, the powder turns into a uniform, smooth and durable coating.

Colored finish application

Final coating cycle with thermosetting powders. Application follows the same principles as the anticorrosive.

Polymerization colored finish

Final baking in an industrial curing oven at a temperature of 180°C. The procedure follows the same principles as the curing of the anticorrosive. The powder is transformed into a uniform coating, and the surface appearance takes on the characteristics of the chosen color type, e.g. smooth, textured, wrinkled, etc.

4/5

Dimcar reserves the right to make, at any time, changes on the products deemed useful to improve the quality of the same; the images contained in the sheets may not faithfully reproduce the real colors of the items.

Datasheet

Tresette bike rack
Product code G496

Rev. 0 of 15/10/2018



DELIVERY

Product supplied in assembly kit with steel hardware and instructions for mounting and grounding.

FIXING

The product is prepared for fixing to the ground using anchor bolts and expansion plugs.

CORPORATE CERTIFICATIONS

ISO 9001:2015

Quality management system.

UNI EN ISO 3834-3:2021

Welding quality management system.

Processing center

Certificate of Processing Center